

University of Oregon Planning Office

Selected Standards for Campus Construction Projects

2003



University of Oregon Planning Office

541-346-5606


<http://darkwing.uoregon.edu/~uplan>

This document contains two types of standards for campus components. The first are standards that have been adopted through campus or governmental policies. The second type of standards are those that are adopted by use, experience and practicality.

The table below outlines standards that have been adopted by campus policy, including the Long Range Campus Development Plan, the Sustainable Development Plan, the Campus Tree Plan, the Bicycle Plan and the Procedure Guide. These standards shall be applied to all projects unless the Campus Planning Committee grants an exception. Additionally all projects are subject to the relevant portions of the Americans with Disabilities Act (ADA) and for historically significant projects, the Secretary of Interiors Guidelines for Rehabilitation.

Items	Policy Reference	Page
Light posts lamps and luminaires		
Post:Visco, painted campus standard green. Fixture: Holophane UGV10DHMT6806 Globe: Granville G-V-8N Agate Street only: Sternberg 4410-DPF with D650 globes.	LRCDP pg. 39 and appendix B	3
Benches		
Wood: Lister No. MD 5 Mendip Teak Smith and Hawken, Glauster Range Gardenside #2606, Parkside	LRCDP pg 39 and appendix B	4
Bike Racks and Shelters		
Shelters: no standard, require CPC review. Racks: Approved hoop style, approved wave style, or Function First Bike Security Bike Rib Series II.		5
Signage		
In general exterior signage is limited to the standard UO building identification signs.	LRCDP pg. 40 and adopted sub plan	6
Universal Design (beyond the requirements of ADA and other applicable standards)		
<ul style="list-style-type: none"> -All entries to buildings will be accessible (excepting doors serving exit stairs and loading docks) -At least one entry will have a power door operator -Platform lifts are not allowed -1:12 is the maximum exterior ramp allowed and 1:20 is preferred 	LRCDP pg. 31	na
Tree preservation and protection		
Removal of trees for project is subject to CPC review. Specific tree protection requirements and process are defined by the Campus Tree plan.	LRCDP and Campus Tree Plan	na

Lighting

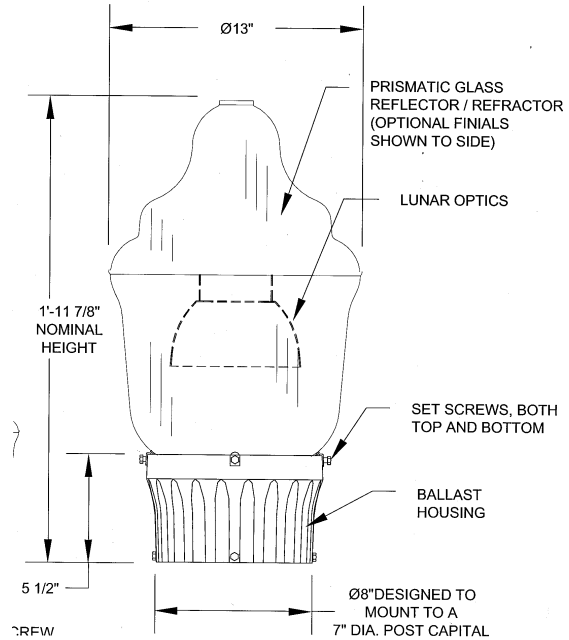

Fixture:


Holophane Granville
UGV10DHMT6806

Globe:

Granville G-V-8N

Post:

Visco series A
Campus standard green.


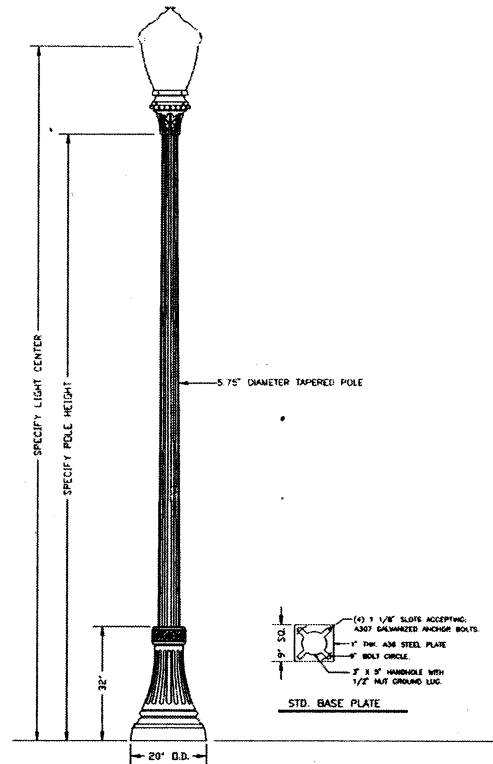


Benches

Smith and Hawken



5' BENCH #N496919 83 LBS.
 6' BENCH #N496927 89 LBS.
 8' BENCH #N496935 114 LBS.

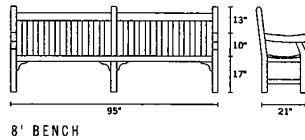

Gloucester Bench

Photographed at the Palace of the Legion of Honor, San Francisco, CA

Our Gloucester series is modeled after outdoor furniture that has withstood the tests of time, weather, and heavy use in English parks. Perfectly proportioned for use in large-scale settings such as museums and public gardens, this classic design features substantial legs, wide rails, and boldly scrolled arms. All three bench lengths have high backs and dished seats; the 8' bench is reinforced with an additional center leg. Exceptionally durable and graceful, the Gloucester Bench sets the standard for public seating. For our complete selection of cushions, see page 53.


GARDENSIDE, LTD.

T - TRADE PRICE

R - RETAIL PRICE

BENCHES AND ARMCHAIRS


#2604 PARKSIDE BENCH 5'
\$650 T / \$815 R - 76 LBS.



No photo

#2210 AVATON BENCH 5'


#2606 PARKSIDE BENCH 6'
\$715 T / \$895 R 81 LBS.

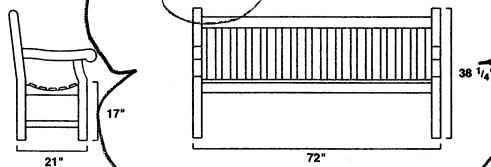

p. 51

#2212 AVATON BENCH 6'

#2608 PARKSIDE BENCH 8'
\$985 T / \$1225 R - 109 LBS.

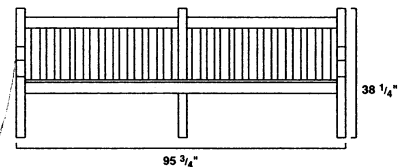

p. 50

#2514 AVATON ARMCHAIR


Building signs

3.1 Standard Sign Module

Building identification signs shall be constructed of painted aluminum channel supports and sign face frames, with embedded polycarbonate (Lexan) sign faces. The signs shall contain The Great Seal, with the building name in uppercase Palatino lettering according to the type specifications listed in Section 5. The lettering shall be centered on the sign face, below the seal.

The material for these signs shall be easily cleaned if vandalism should occur.

Lettering and sign faces shall be sized according to the requirements of each location.

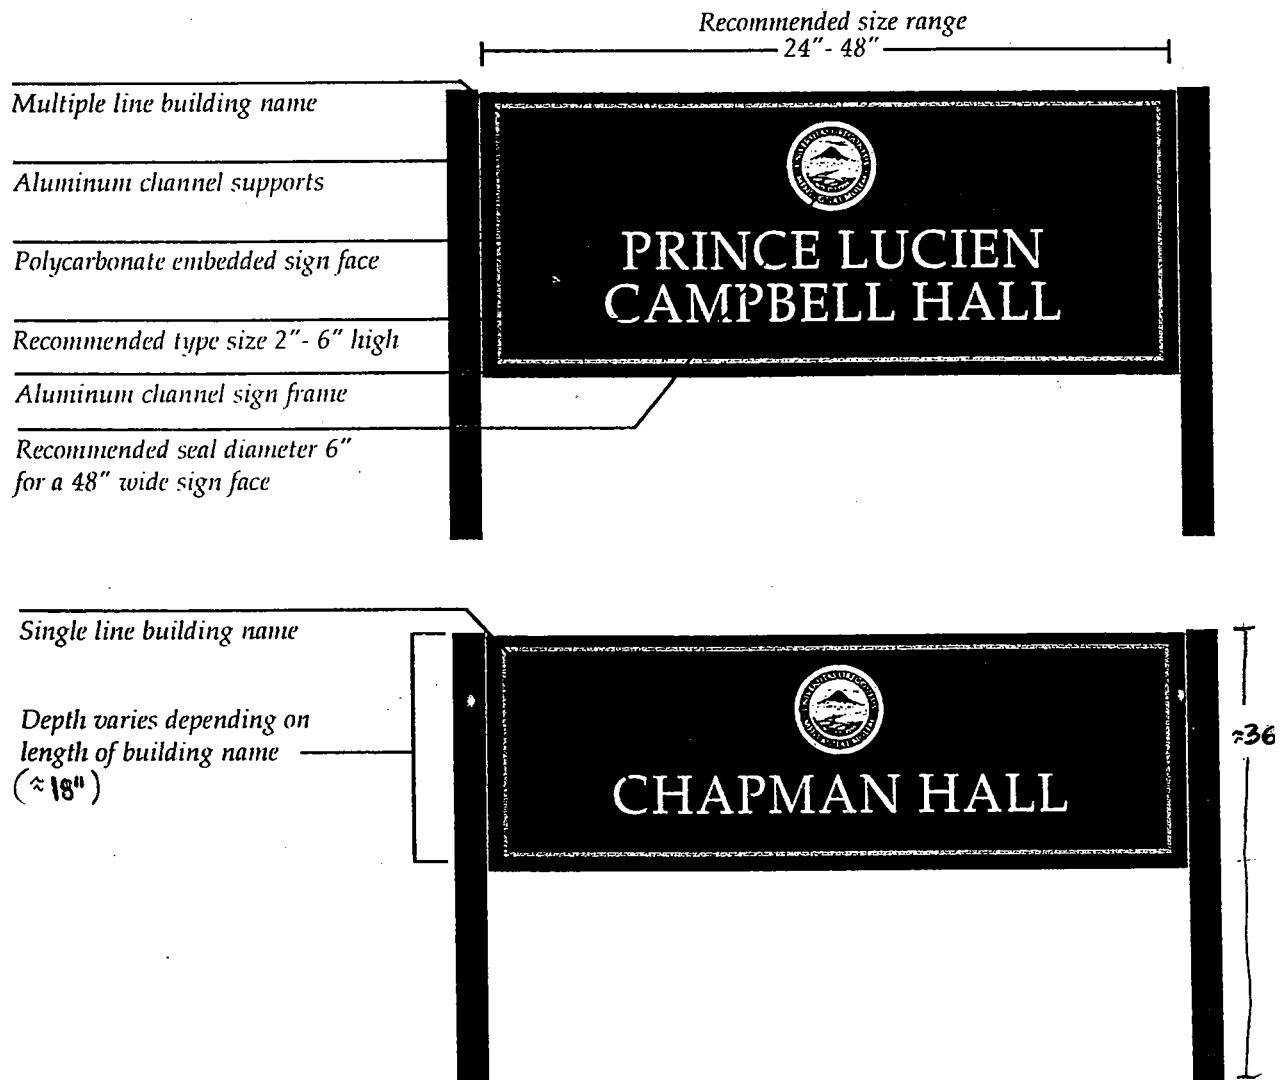

The following items are in use as university standards although not adopted by policy:

Items	Page
-------	------

Site fixtures and/or furnishings

Trash Cans

Wausau Tile #TF1215, B1 finish with Oregon 'O' logo	8
---	---

Ash cans

Custom fabricated by UO Facilities	na
------------------------------------	----

Bollards

VISCO # VI-BO-14	8
------------------	---

Installation Standards

Central utilities (power, steam, chilled water, etc) shall be routed within tunnels and new tunnel connections built where necessary. Direct burial of centrally supplied utilities is not allowed.

Dumpsters and recycling bins are to be screened from view by means of masonry screens and decorative fencing. Chain linked fencing is to be avoided. Where appropriate plantings are to supplement the enclosure.


Pad mounted transformers and back flow prevention devices are to be screened by appropriate plantings.

Trash cans




Wausau Tile

★ TF1215
 26" Dia. x 42"
 800 lbs. / 31 gal.
 Options: A1, B1
 Shown in: Tan
 w/ Brown Matrix



Bollards

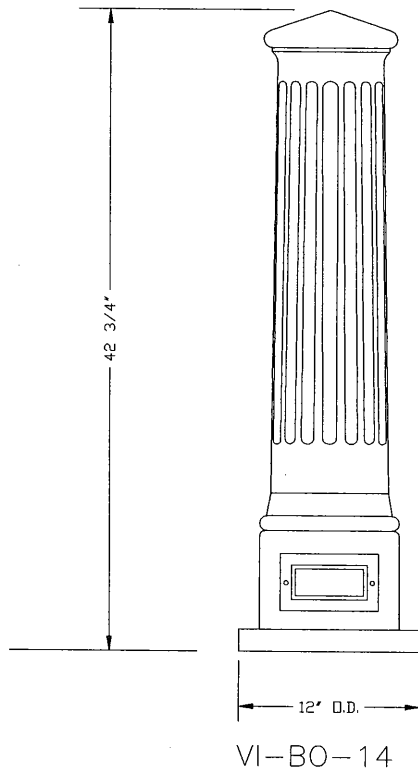


SPECIFICATION REQUIREMENTS:

ASTM A48-83, CLASS 30 GRAY IRON
 PAINT FINISH

OPTIONAL EQUIPMENT:

REMOVABLE ANCHORING SYSTEM
 SINGLE RECEPTACLE

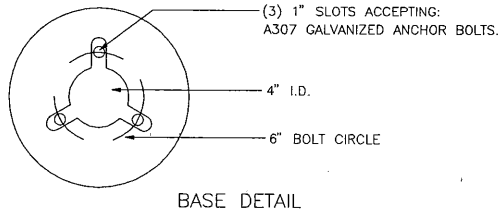

29579 AWBREY LANE, EUGENE, OR 97402
 (541) 688-7741, FAX: (541) 461-0951